❒   811

A regenerative braking energy recuperation from elevator operation in building by active rectifier

An Thi Hoai Thu Anh, Luong Huynh Duc

Department of Electrical Engineering, University of Transportand Communications, Hanoi, Vietnam

Article Info	ABSTRACT
	Elevators- means of vertical transportation to carry people and goods are an indispensable part in offices, high-rise buildings, hospitals, commercial areas, hotels, car-parks when blooming urbanization develops worldwide. However, the level of energy consumption in elevator operation is significant, so energy saving solutions have been outlined and applied in practice. With frequent braking phases, regenerative braking energy is wasted on braking resistors. Therefore, this paper proposes regenerative braking energy recuperation method for elevator operation in building by active rectifiers enabling the braking energy to be fed back into utility grid. Simulation results conducted by MATLAB with data collected from OCT5B building-RESCO new urban area, Hanoi, Vietnam have verified saving energy of using active rectifiers replacing diode rectifiers up to 33%. *This is an open access article under the [CC BY-SA](#) license.*

Corresponding Author:

An Thi Hoai Thu Anh
Department of Electrical Engineering
University of Transport and Communications
No. 3 Cau Giay, Lang Thuong Commune, Dong Da District, Hanoi, Vietnam
Email: htanh.ktd@utc.edu.vn

1. INTRODUCTION

Elevators are very important with high-rising buildings [1]-[3], however, these electrical transport systems can account for a considerable proportion of energy consumption in buildings while the regenerative braking energy obtained by operation modes of elevators at the time of lifting-up with light load and lifting-down with heavy load is burned on the braking resistors, causing wastage and air pollution [1]-[2]. Therefore, improving the energy efficiency of elevator operation has attracted more attention from manufacturers and researchers, most of whom have proposed various energy saving solutions applied in practice [4]-[9]. Priyanka Priyanka Kubade, and S. K. Umathe [10]; A. Rufer, and Philippe Barrade [11] recovered regenerative braking energy by supercapacitors energy storage device and reutilized it when the more energy is required by another elevator motor; M. Shreelakshmi, and Vivek Agarwal [12] combined fuel cell for the ride-through operation with supercapacitor bank for storing the regenerative braking energy; Shili Lin, Wenji Song, Yongzhen Chen, *et. al.* [13] used the battery energy storage system to suppress the voltage fluctuation of the DC grid of elevator, making it capable of replacing the resistor in the braking system of the elevator; Supapradit Marsong and Boonyang Plangklang, *et. al.* [14], Boonyang Plangklang, Sittichai Kantawong, Sirichai Dangeam, *et. al.* [15] designed an energy-regenerative unit integrated with permanent magnet motor elevator systems which can be save up to 43%; Konstantinos Kafalis and Athanasios D. Karlis [16] showed supercapacitor or flywheel energy storage systems (SCESS, FESS) driven by a permanent magnet motor in which FESS are mainly used for power applications from 1 kW up to 1 MW, while supercapacitors for 1-100kW and 200Wh-500Wh respectively and FESS save regenerative braking energy more effectively than SCESS about 6%. Furthermore, optimization techniques such as: linear programming, mixed-integer linear

programming, quadratic programming, model predictive control, dynamic programming are applied to minimize energy consumption in elevator operation. A. Mesemanolis, C. Mademlis, and I. Kioskeridis [17], Nikolaos Jabbour and Christos Mademlis [18], [19] used an energy management system based on an adaptive neuro-fuzzy control technique applied to an elevator motor drive to adjust the elevator acceleration/deceleration rate and speed so as to maximize the regenerative capability of the motor drive and therefore to increase the efficiency of the whole elevator system: Endika Bilbao, Philippe Barrade, Ion Etxeberria-Otadui, *et. al.* [20] applied optimal energy management strategy of an elevator with energy storage capacity based on dynamic programming (DP) to reduce grid power peaks by 65%, and braking resistor energy losses have been reduced by 84%. This paper proposes another regenerative braking energy recuperation solution-the active rectifier with bidirectional energy flow replacing diode rectifier so that the regenerative braking energy will be backed to the grid. The simulation results on MATLAB of buildings in Hanoi, Vietnam indicate that energy savings is up to 33%.

2. ENERGY SAVING FOR AN ELEVATOR

The elevator system as Figure 1 comprises of mainly parts: active rectifier is able to turn energy back grid in order to recover regenerative braking energy and the voltage oriented control (VOC) is used to control the rectifier method similar to the field-oriented control method (FOC) of elevator driven motor [21]-[25]. In this section focusing on modelling and controlling the active rectifier-a crucial device in the elevator operation energy saving.
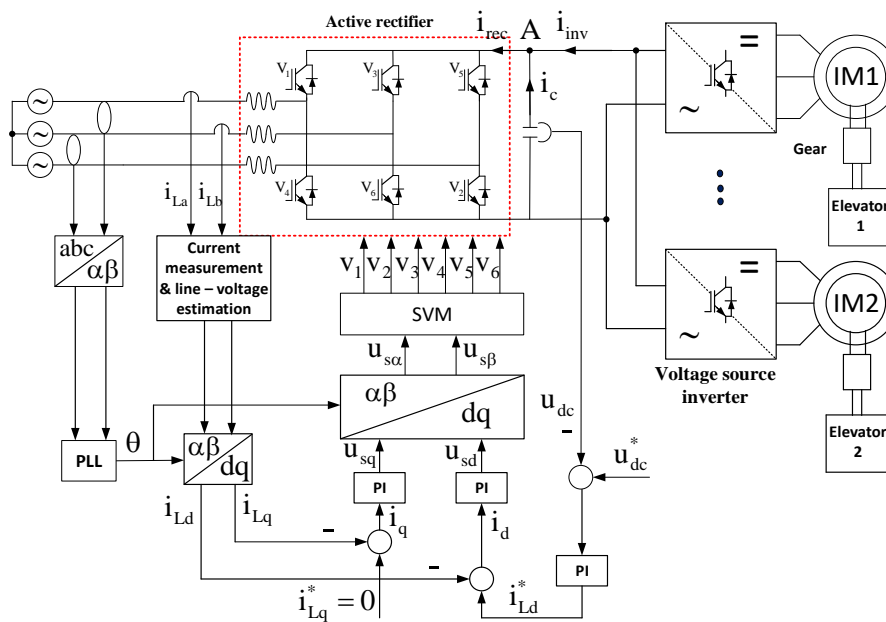

Figure 1. Control scheme of elevator system

From Figure 1 and Figure 2 (a), the three voltage equations for balanced three-phase system without the neutral connection (Figure 2 (a)) can be written as.

$$\begin{bmatrix} U_{La} \\ U_{Lb} \\ U_{Lc} \end{bmatrix} = R \begin{bmatrix} i_{La} \\ i_{Lb} \\ i_{Lc} \end{bmatrix} + L \frac{d}{dt} \begin{bmatrix} i_{La} \\ i_{Lb} \\ i_{Lc} \end{bmatrix} + \begin{bmatrix} U_{sa} \\ U_{sb} \\ U_{sc} \end{bmatrix} \tag{1}$$

and one for currents.

$$C \frac{du_{dc}}{dt} = S_a i_{La} + S_b i_{Lb} + S_c i_{Lc} - i_{inv} \tag{1}$$

Where Sa, Sb, Sc-the switching function of the active rectifier

Using the Clarke and Park transformations to convert the system of (1) from the coordinates *(abc)* to the coordinates *(dq)* [22].

$$\begin{cases} u_{Ld} = R i_{Ld} + L \frac{di_{Ld}}{dt} - w_L L i_{Lq} + u_{sd} \\ u_{Lq} = R i_{Lq} + L \frac{di_{Lq}}{dt} + w_L L i_{Ld} + u_{sq} \end{cases} \tag{2}$$

$$c \frac{du_c}{dt} = (i_{Ld} S_d + i_{Lq} S_q) - i_{inv} \tag{3}$$

Given

$$\begin{cases} S_d = S_a \cos w_L t + S_b \sin w_L t \\ S_q = - S_a \sin w_L t + S_b \cos w_L t \end{cases} \tag{4}$$

$$\begin{cases} S_\alpha = \frac{1}{\sqrt{6}} (2S_a - S_b - S_c) \\ S_\beta = \frac{1}{\sqrt{2}} (S_b - S_c) \end{cases} \tag{5}$$
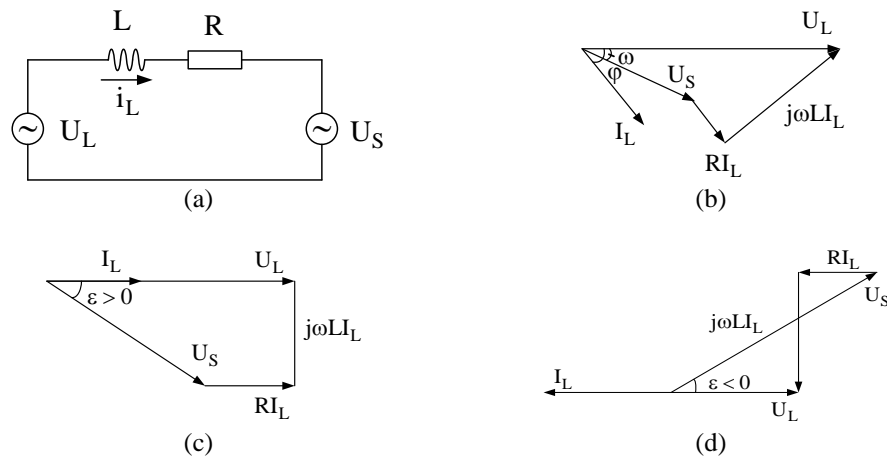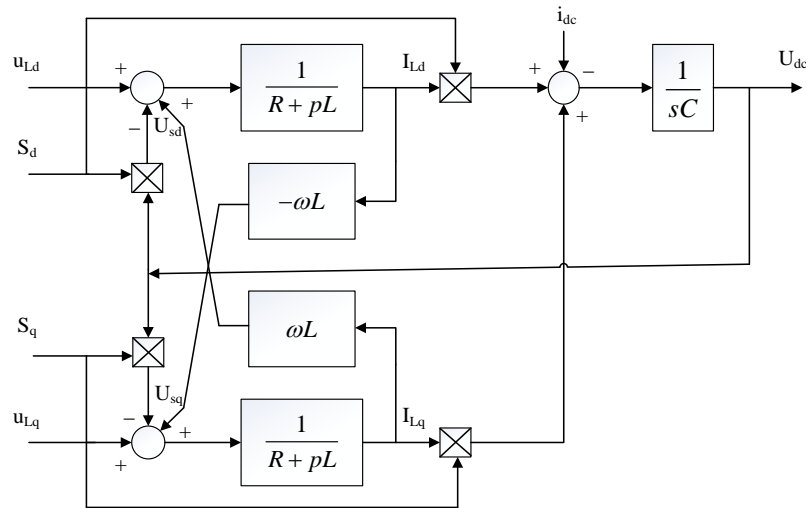

Figure 2. Phasor diagrams, (a) single-phase diagram of rectifier circuit, (b) general phasor diagram, (c) Rectification at unity power factor, (d) Regeneration at unity power factor

Therefore, the mathematical model structure of the active rectifier in the *dq* coordinates is shown in Figure 3

Figure 3. Active rectifier model in *dq* coordinates

2.2. Design of control loops
In order to achieve great advantages of the active rectifier. In this section, designing three control loops phase locked loop, current loop and voltage loop is performed.

2.2.1. Phase locked loop (PLL)
The PLL performs the determination of the phase angle between the grid voltage vector and the α-axis of the coordinate system *αβ*, which is also the angle between the d-axis of the rotation coordinates *dq* with α-axis of fixed coordinates *αβ*, for converting current and voltage vector coordinates as shown in Figure 4. Figure 5 shows voltage vectors on the axes *αβ* and *dq* and Figure 6 shows control structure of PLL phase-lock loop.

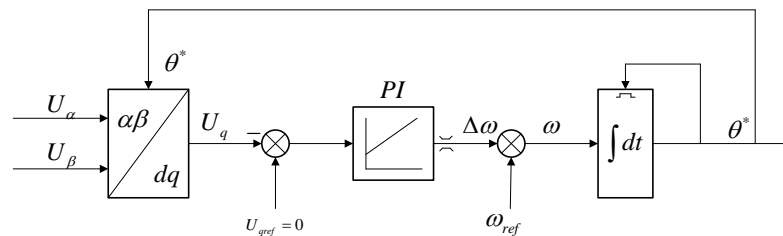Figure 4. PLL scheme

with *Uq* is calculated according to the transformation formula.

$$Uq = -U.\sin(\theta * - \theta) = U.\sin(\Delta\theta) \tag{6}$$

$\Delta\theta$ is small, $Uq = U.\Delta\theta$
where:

U_q : source voltage on q-exis of *dq* coordinates

q^* is the PLL block output leaning angle

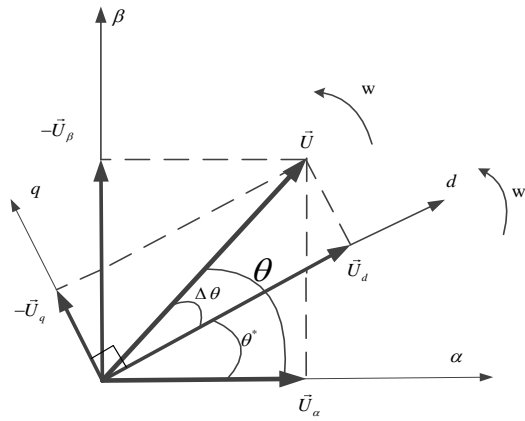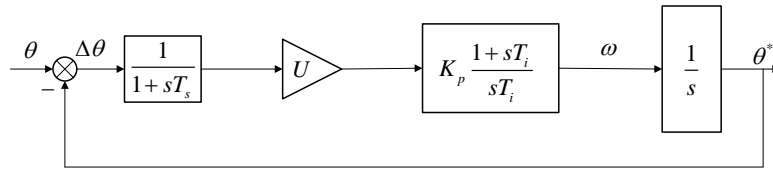q is the source voltage phase angle

Figure 5. Voltage vectors on the axes $\alpha\beta$ and dq

Figure 6. Control structure of PLL phase-lock loop

The closed-loop phase transfer function.

$$F_{k\theta}(s) = \frac{F_{h\theta}(s)}{1 + F_{h\theta}(s)} = \frac{k_1 \dfrac{1 + T_{i\theta}s}{s^2}}{1 + k_1 \dfrac{1 + T_{i\theta}s}{s^2}} = \frac{k_1 T_{i\theta}s + k_1}{s^2 + k_1 T_{i\theta}s + k_1} \circ \frac{2.\xi.\omega_n s + \omega_n^2}{s^2 + 2.\xi.\omega_n s + \omega_n^2} = G_k(s) \tag{7}$$

Using the symmetric optimization method with the standard function $G_k(s)$[25], then seeking $k_{p\theta}, T_{i\theta}$.

$$\Rightarrow \begin{cases} k_1 = \omega_n^2 \\ k_1 T_{i\theta} = 2.\xi.\omega_n \end{cases} \Leftrightarrow \begin{cases} k_1 = \dfrac{k_{p\theta}U}{T_{i\theta}} = \omega_n^2 \\ T_{i\theta} = \dfrac{2.\xi.\omega_n}{\omega_n^2} = \dfrac{2.\xi}{\omega_n} \end{cases} \Leftrightarrow \begin{cases} k_{p\theta} = \dfrac{\omega_n^2 T_{i\theta}}{U} \\ T_{i\theta} = \dfrac{2.\xi}{\omega_n} \end{cases}$$

Where ω_n- Oscillation cycle, ξ-Damping ratio (select $\xi = 0.7$).

2.2.2. Design current control loop

Inner loop circuit-current loop: The task is to bring reactive power $Q \approx 0$ and coefficient $\cos\varphi \approx 1$. Deriving from (3): Ignoring the coupling component ωL, transfer function relating i_{Ld} with Δu_{Ld} is computed straight forwardly (Figure 7).

$$\frac{I_{Ld}}{U_{Ld} - U_{sd}} = \frac{1}{R + Ls} \tag{9}$$
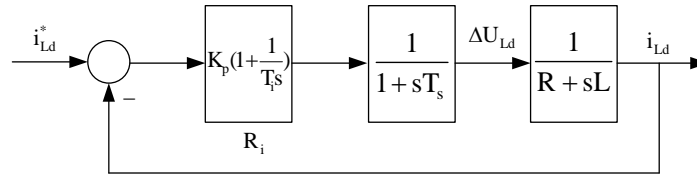
Figure 7. Control structure of i_{Ld} current controller

The closed-loop transfer function of the inner loop i_{Ld} turns out to be.

$$G_k(\text{s}) = \frac{k(1 + T_i s)}{\left(1 + T_2 s\right)T_a s + k(1 + T_i s)} \tag{8}$$

To calculate controller parameters, the module optimal method is used [26].

$$\Rightarrow \begin{cases} T_i = T_1 = \dfrac{L}{R} \\ T_a = 2kT_2 \end{cases} \Leftrightarrow \begin{cases} T_i = \dfrac{L}{R} \\ \dfrac{T_i}{k_p} = 2\dfrac{1}{R}T_s \end{cases} \Leftrightarrow \begin{cases} T_i = \dfrac{L}{R} \\ k_p = \dfrac{L}{2T_s} \end{cases}$$

Similarly, synthesising i_{Lq} control loop as i_{Ld} control loop. Then, considering the components ωL to compensate the coupling of inner control loops as Figure 8.
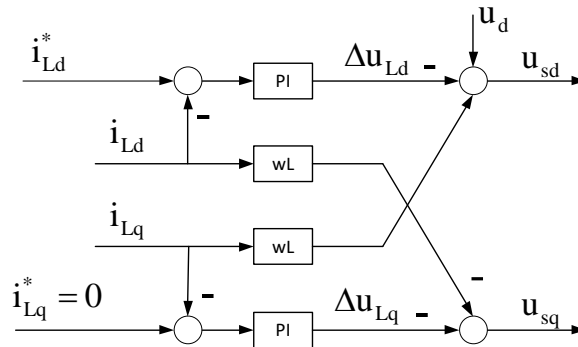

Figure 8. Decoupled current controller block diagram

2.2.3. Design voltage control loop
Designing voltage control loop is to balance energy from grid unity to load by keeping the voltage on the U_{dclink} unchanged at the fixed value. From the (3).

$$CsU_{dc} = I_{Ld}S_d + I_{Lq}S_q - I_{inv}$$

Given

$$I_{Lq}=0 \Rightarrow U_{dc} = \frac{I_{Ld}S_d - I_{inv}}{Cs} \tag{9}$$

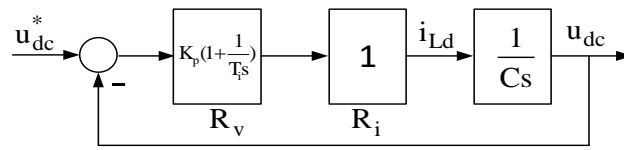Regarding I_{inv} as a noise component, so it is omitted.

Figure 9. Voltage controller block diagram

The closed-loop transfer function of voltage control loop.

$$F_{kV}(s) = \frac{F_{hV}(s)}{1 + F_{hV}(s)} = \frac{k_1 \dfrac{1 + T_{iV} s}{s^2}}{1 + k_1 \dfrac{1 + T_{iV} s}{s^2}} = \frac{k_1 T_{iV} s + k_1}{s^2 + k_1 T_{iV} s + k_1} \circ \frac{2.\xi.\omega_n s + \omega_n^2}{s^2 + 2.\xi.\omega_n s + \omega_n^2} = G_k(s) \qquad (10)$$

Use the symmetric optimal method with the standard function $G_k(s)$.

$$\Rightarrow \begin{cases} k_1 = \omega_n^2 \\ k_1 T_{iV} = 2.\xi.\omega_n \end{cases} \Leftrightarrow \begin{cases} k_1 = \dfrac{k_{pV}}{T_{iV}.C} = \omega_n^2 \\ T_{iV} = \dfrac{2.\xi.\omega_n}{\omega_n^2} = \dfrac{2.\xi}{\omega_n} \end{cases} \Leftrightarrow \begin{cases} k_{pV} = \omega_n^2 T_{iV}.C \\ T_{iV} = \dfrac{2.\xi}{\omega_n} \end{cases}$$

3. SIMULATION RESULTS

The simulation is conducted by data collected from OCT5B building-RESCO new urban area, Hanoi, Vietnam. Simulation results verifying energy saving capability of the active rectifier are Considered by scenarios: full load up-the most energy consumption; full load down-the most energy saving when the elevator operates in ten floors of buildings with total time about 50,76s (in which running time of each floor: accelerating phase-0.66s, holding speed phase-2.14s, braking phase-0.66s, dwell time-2s).

Table 1. Parameters of elevator system for OCT5B building

Parameters	√alues
Number of floors	10
Distance between floors (m)	2,8
Cabin's weight (kg)	1200
Counterweight (kg)	1600
Passangers weight (kg)	1000
Maximum speed, v_{max} (m/s)	1
Acceleration and deceleration, a_{max} (m/s^2)	1.5
Pulley diameter, D (m)	0.4
Transmission ratio, i	1/20
Transmission performance, η	80%
Nominal power P (kW) of each motor	15
Number of elevators	2

Table 2. Parameters of active rectifiers

Parameters	Values
Phase inductance, L(mH)	2
Phase resistance, R (Ω)	0.05
Capacitance of DC link capacitor C (μF)	1000

Table 3. Parameters of controllers

	K_p	T_i
Current loop	2	0.04
Voltage loop	0.56	0.0035
Phase Locked Loop (PLL)	0.74	0.007

Figure 10 and Figure 11 show that the speed value with full load up process is 1m/s, and full load down one is -1m/s suitable for the change situation of the regenerative power; namely, the power as the full load elevator moving up consumed up to 2600W meanwhile the power as the full load elevator moving down backs grid utility about -1700W. With often operation processes of elevator: accelerating, holding speed,

braking causing voltage fluctuation on bus DC demonstrated in Figure 12 with the diode rectifier. In the case of full load up, traction motor operating in accelerating phase needs to mobilize power, so voltage decrease, voltage fluctuation is from 620 to 650V DC (Figure 12 (a)); with full load down, the traction motor works as the electric generator turning power to line, which causes voltage on DC bus to increase from 650 to 800VDC (Figure 12 (b)).
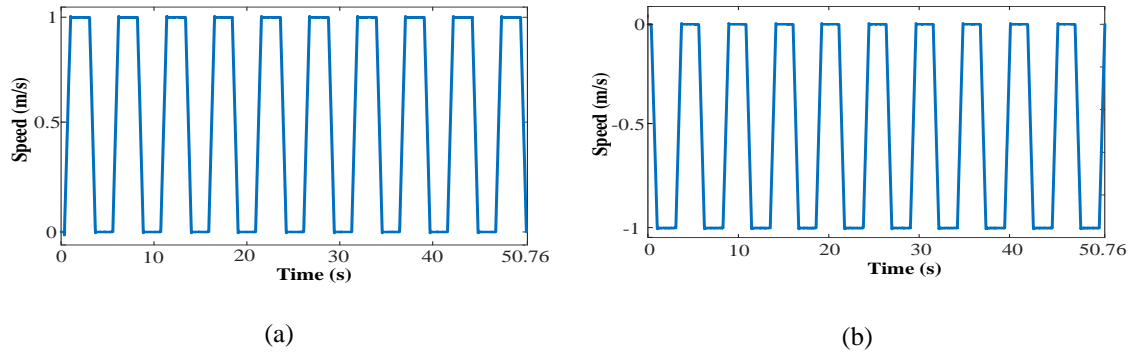

(a)   (b)

Figure 10. Speed responses, (a) full load up, (b) full load down

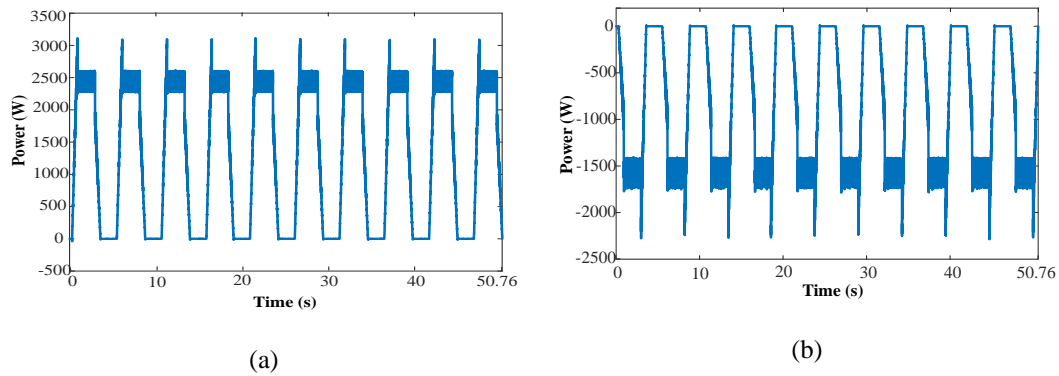(a)   (b)

Figure 11. The change situation of the regenerative power, (a) full load up, (b) full load down

(a)   (b)
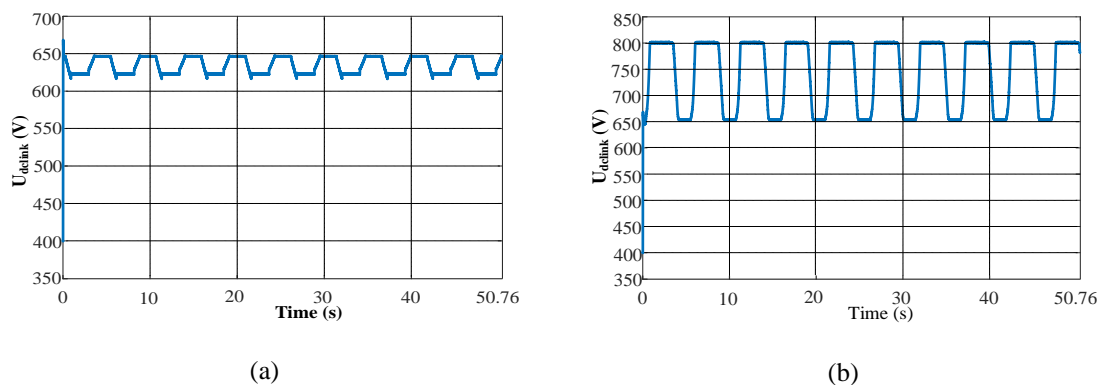
Figure12. Responses of voltage on U_{dclink} with diode rectifier, (a) full load up, (b) full load down

On contrary, the active rectifier still ensures the grid voltage within the range allowed 650 VDC in Figure 13 and guarantees the safety of the power supply system of the elevator when the elevator runs up, and runs down with full load.
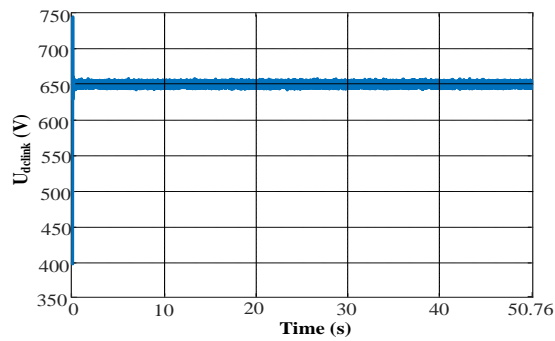
Figure 13. Response of voltage on U_{dclink} with active rectifier when full load up and full load down.

Comparing level of energy saving when using active rectifier in Figure 14, Figure 15 shows consumption energy response of grid source when elevator moves up with full load is 46Wh, and regenerative braking energy turns source when the elevator moves down with full load and uses active rectifier is 15,8Wh. Therefore, percent of saving energy is 33%.
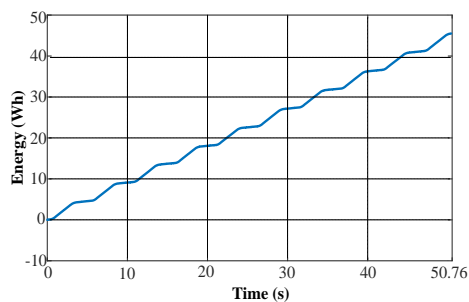

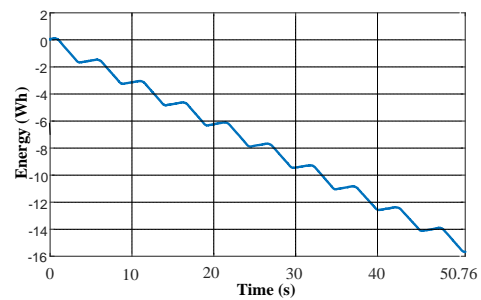Figure 14. Consumption energy response of grid source when elevator moves up with full load

Figure 15. Regenerative braking energy flows back source with active rectifier when the elevator moves down with full load

4. CONCLUSION

In this paper, the main focus is on enhancing elevator efficiency by reducing its consumption energy. The simulation results of elevator drive system with the active rectifier replacing diode one in OCT5B building-RESCO new urban area, Ha noi, Vietnam showed by using active rectifier, energy can save up to 33%.

REFERENCES

[1] G. C. Barney, and S. M. dos Santos, Elevator traffic analysis, design and control, 2nd Edition, Inst of Engineering & Technology, 1985.
[2] Yongming Zhang, Zhe Yan, Feng Yuan, Jiawei Yao, and Bao Ding, "A novel reconstruction approach to elevator energy conservation based on a DC micro-grid in high-rise buildings," *Energies*, vol. 12, no. 1, pp. 33, 2019, DOI: 10.3390/en12010033.
[3] Gina Barney, and Lutfi Al-Sharif, Elevator traffic handbook: Theory and practice, Routledge, 2015.
[4] Mohammed Hasan Ali, "Design and implementation of an electrical lift controlled using PLC," *International Journal of Electrical and Computer Engineering (IJECE)*, vol. 8, no. 4, 2018, DOI: 10.11591/ijece.v8i4.pp1947-1953.
[5] M. Fatih Adak, Nevcihan Duru, and H. Tarık Duru "Elevator simulator design and estimating energy consumption of an elevator system," *Energy and Buildings*, vol. 65, pp. 272-280, 2013, DOI: 10.1016/j.enbuild.2013.06.003.

[6] Karlis, A. D, "Energy consumption estimation on lift systems: The advantages of vvvf drives," *2014 International Conference on Electrical Machines (ICEM), IEEE*, 2014.

[7] C. Carrillo, E. Díaz-Dorado, J. Cidrás, and M. Silva-Ucha, "A methodology for energy analysis of escalators," *Energy and buildings*, vol. 61, pp. 21-30, 2013, DOI: 10.1016/j.enbuild.2013.01.038.

[8] Lutfi Al-Sharif, "Modelling of escalator energy consumption," *Energy and Buildings*, vol. 43, no. 6, pp. 1382-1391, 2011, DOI: 10.1016/j.enbuild.2011.01.014.

[9] Aníbal De Almeida, Simon Hirzel, Carlos Patrão, João Fong, and Elisabeth Dütschke, "Energy-efficient elevators and escalators in Europe: An analysis of energy efficiency potentials and policy measures," *Energy and buildings*, vol. 47, pp. 151-158, 2012, DOI: 10.1016/j.enbuild.2011.11.053.

[10] Priyanka Kubade, and S. K. Umathe, "Enhancing an elevator efficiency by using supercapacitor," *2017 Third International Conference on Advances in Electrical, Electronics, Information, Communication and Bio-Informatics (AEEICB). IEEE*, 2017, DOI: 10.1109/AEEICB.2017.7972364.

[11] A. Rufer, and Philippe Barrade, "A supercapacitor-based energy-storage system for elevators with soft commutated interface," *Conference Record of the 2001 IEEE Industry Applications Conference. 36th IAS Annual Meeting (Cat. No.01CH37248),* vol. 38, no. 5, pp. 1151-1159, 2002, DOI: 10.1109/IAS.2001.955719.

[12] M. Shreelakshmi, and Vivek Agarwal, "An energy efficient and environment friendly elevator system using ultracapacitor and fuel cell with power factor correction," *2013 IEEE ECCE Asia Downunder*, 2013, DOI: 10.1109/ECCE-Asia.2013.6579181.

[13] Shili Lin, Wenji Song, Yongzhen Chen, Ling Luo, and Ziping Feng, "Study on the model of elevator regeneration energy and its energy storage control method," *2015 International Conference on Smart Grid and Clean Energy Technologies (ICSGCE), IEEE*, 2015, DOI: 10.1109/ICSGCE.2015.7454282.

[14] Supapradit Marsong and Boonyang Plangklang, "Implementation analysis of an elevator energy regenerative unit (EERU) for energy saving in a building," *2016 13th International Conference on Electrical Engineering/Electronics, Computer, Telecommunications and Information Technology (ECTI-CON), IEEE*, 2016, DOI: 10.1109/ECTICon.2016.7561421.

[15] Boonyang Plangklang, Sittichai Kantawong, Sirichai Dangeam, and Yuttana Kumsuwan, "Elevator energy regenerative unit (EERU) for energy saving in a permanent magnet motor elevator system," *2014 17th International Conference on Electrical Machines and Systems (ICEMS)*, pp. 2120-2124, 2014, DOI: 10.1109/ICEMS.2014.7013835.

[16] Konstantinos Kafalis and Athanasios D. Karlis, "Comparison of flywheels and supercapacitors for energy saving in elevators," *2016 IEEE Industry Applications Society Annual Meeting, IEEE*, 2016, DOI: 10.1109/IAS.2016.7731825.

[17] A. Mesemanolis, C. Mademlis, and I. Kioskeridis, "Neuro-fuzzy energy management system in elevator drive applications for maximum braking energy regenerative capability," *7th IET International Conference on Power Electronics, Machines and Drives (PEMD 2014)*, pp. 2-10, DOI: 10.1049/cp.2014.0494.

[18] Nikolaos Jabbour and Christos Mademlis, "Improved control strategy of a supercapacitor-based energy recovery system for elevator applications," *IEEE Transactions on Power Electronics*, vol. 31, no. 12 pp. 8398-8408, 2016, DOI: 10.1109/TPEL.2016.2516104.

[19] Nikolaos Jabbour and Christos Mademlis, "Supercapacitor-based energy recovery system with improved power control and energy management for elevator applications," *IEEE Transactions on Power Electronics*, vol. 32, no. 12, pp. 9389-9399, 2017, DOI: 10.1109/TPEL.2017.2655119.

[20] Endika Bilbao, Philippe Barrade, Ion Etxeberria-Otadui, Alfred Rufer, Sergio Luri and Iñigo Gil, "Optimal energy management strategy of an improved elevator with energy storage capacity based on dynamic programming," *IEEE Transactions on Industry Applications*, vol. 50, no. 2 pp. 1233-1244, 2013, DOI: 10.1109/TIA.2013.2276015.

[21] Dygku Aniqnatasa Awg Osman, Rahimi Baharom, Dalina Johari, Muhamad Nabil Hidayat, and Khairul Safuan Muhammad, "Development of active power filter using rectifier boost technique," *International Journal of Power Electronics and Drive Systems (IJPEDS)*, vol. 10, no, 3, pp. 1446-1453, 2019, DOI: 10.11591/ijpeds.v10.i3.pp1446-1453.

[22] M. Dabbaghjamanesh, A. Moeini, M. Ashkaboosi, P. Khazaei, and K. Mirzapalangi, "High performance control of grid connected cascaded H-Bridge active rectifier based on type II-fuzzy logic controller with low frequency modulation technique," *International Journal of Electrical and Computer Engineering (IJECE)*, vol. 6, no. 2, 2016, DOI: 10.11591/ijece.v6i2.pp484-494.

[23] Indriarto Yuniantoro, Rudy Setiabudy, and Ridwan Gunawan, "Comparison of voltage vector control based on duty cycle analysis in three phase four leg system of active filter," *International Journal of Electrical & Computer Engineering (IJECE)*, vol. 6, no. 4, pp. 1395-1405, 2016, DOI: 10.11591/ijece.v6i4.pp1395-1405.

[24] Quang, Nguyen Phung, Dittrich, and Jörg-Andreas, Vector control of three-phase AC machines, Berlin, Heidelberg: Springer, 2008.

[25] Roslina Mat Ariff, Dirman Hanafi, Wahyu Mulyo Utomo, Nooradzianie Muhammad Zin, Sy Yi Sim, and Azuwien Aida Bohari, "Takagi-Sugeno fuzzy perpose as speed controller in indirect field oriented control of induction motor drive," *International Journal of Power Electronics and Drive Systems (IJPEDS)*, vol. 5, no. 4, 2017, DOI: 10.11591/ijai.v5.i4.pp149-157.

[26] Constantine H. Houpis, and Stuart N. Sheldon, Linear control system analysis and design with MATLAB, CRC Press, 2013.

BIOGRAPHIES OF AUTHORS

An Thi Hoai Thu Anh received her Engineer (1997), MSc (2002) degrees in Industrial Automation Engineering from Hanoi University of Science and Technology, and completed PhD degree in 2020 from University of Transport and Communications (UTC). Now, she is a Lecturer of Faculty of Electrical and Electronic Engineering under University of Transport and Communications (UTC), Vietnam. Her current interests include Power Electronic Converters, Electric Motor Drive, saving energy solutions applied for industry and transportation.

Luong Huynh Duc is the 4th year undergraduate student at Faculty of Electrical and Electronic Engineering under University of Transport and Communications (UTC), Vietnam. His current interests include Power Electronic Converters, Electric Motor Drive.